



Poly

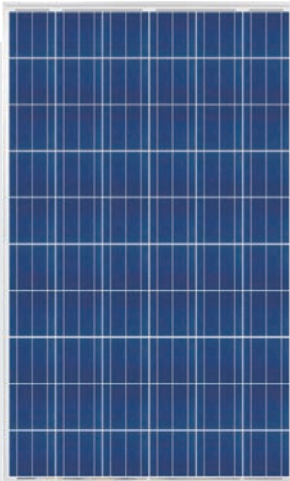

Powerguard insurance global coverage

Within the first year, the output power shall not be less than 97.5% of the minimum output power in CSUN's product datasheet, thereafter the loss of output power shall not exceed 0.7% per year, ending with 80.7% in the 25th year.

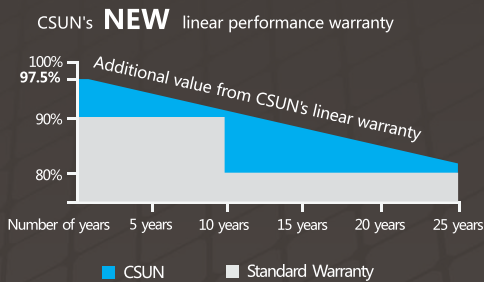

CSUN 260-60P

The Commercial Installation Offer

CSUN 245-60P CSUN250-60P
 CSUN 255-60P CSUN260-60P

16.01%
Module efficiency

Innovated cell and module processing technology

260W
Highest power output

positive tolerance offer

10 year
Material & Workmanship warranty

Certified for salt/ammonia corrosion resistance

25 year
Linear power output warranty

Load certificates: wind to 2400Pa and snow to 5400Pa

Excellent performance under low light conditions

Good temperature coefficient enables higher output in high temperature regions

- China Sunergy (Nanjing) Co., Ltd.(NASDAQ:CSUN), established in 2004, is a hi-tech corporation with its core business in R&D, manufacturing, and sale of high efficiency silicon based solar cells and modules.
- As one of the leading PV enterprises in the world, CSUN has delivered more than 2.4GW solar products, to residential, commercial, utility and off-grid projects all around the world.
- Through strict selection of raw materials, stringent quality control and rigorous test in state of the art facilities in Nanjing and Shanghai, CSUN has always committed to higher efficiency, more stable and better cost effective products.

*Note:
All specifications, warranties, certifications about module of "CSUN" series also apply to that of "SST".

All information and data are subject to change without notice.



Electrical Characteristics at Standard Test Conditions (STC)

Module Type	CSUN 260-60P	CSUN 255-60P	CSUN 250-60P	CSUN 245-60P
Maximum Power-Pmax (W)	260	255	250	245
Open Circuit Voltage - Voc (V)	37.7	37.5	37.3	37.1
Short Circuit Current - Isc (A)	8.95	8.88	8.81	8.74
Maximum Power Voltage - Vmpp (V)	30.3	30.1	29.9	29.7
Maximum Power Current - Impp (A)	8.58	8.47	8.36	8.25
Module Efficiency	16.01%	15.70%	15.40%	15.09%

Standard Test Conditions [STC]: irradiance 1,000 W/m²; AM 1.5G; module temperature 25°C. Measuring uncertainty of power is within ±3%. Tolerance of Pmpp:0~+3%. Certified in accordance with IEC61215, IEC61730-1/2 and UL1703.

Electrical Characteristics at Nominal Operating Cell Temperature (NOCT)

Module Type	CSUN 260-60P	CSUN 255-60P	CSUN 250-60P	CSUN 245-60P
Maximum Power-Pmax (W)	192	188	185	181
Open Circuit Voltage - Voc (V)	34.9	34.6	34.5	34.2
Short Circuit Current - Isc (A)	7.20	7.16	7.10	7.02
Maximum Power Voltage - Vmpp (V)	28.1	28.0	27.9	27.5
Maximum Power Current - Impp (A)	6.82	6.72	6.64	6.58

Nominal Operating Module Temperature(NOCT): irradiance 800W/m²; wind speed 1m/s; ambient temperature 20°C. Measuring uncertainty of power is within ±3%, Certified in accordance with IEC61215, IEC61730-1/2 and UL1703.

Temperature Characteristics

Voltage Temperature Coefficient	-0.292%/°C
Current Temperature Coefficient	+0.045%/°C
Power Temperature Coefficient	-0.408%/°C
NOCT	45±2°C

Maximum Ratings

Maximum system voltage(V)	1000
Series fuse rating(A)	20

Mechanical Characteristics

Dimensions	1640 × 990 × 35 mm (L × W × H)
Weight	18.3 kg
Frame	Anodized aluminum profile
Front Glass	White toughened safety glass, 3.2mm
Cell Encapsulation	EVA(Ethylene-Vinyl-Acetate)
Back Sheet	Composite film
Cells	6×10 pieces polycrystalline solar cells series strings (156mm×156mm)
Junction Box	Rated current ≥12A, IP ≥65
Cable & Connector	Length 900mm, 1×4mm ² , compatible with MC4


Packaging

Container 20'	360 pcs
Container 40'	840 pcs
Container 40' HC	896 pcs



System Design

Temperature range	-40°C to +85°C
Hail	maximum diameter of 25mm with impact speed of 23m/s
Maximum surface load	5400Pa
Application class	class A
Safety class	class II

Dimensions

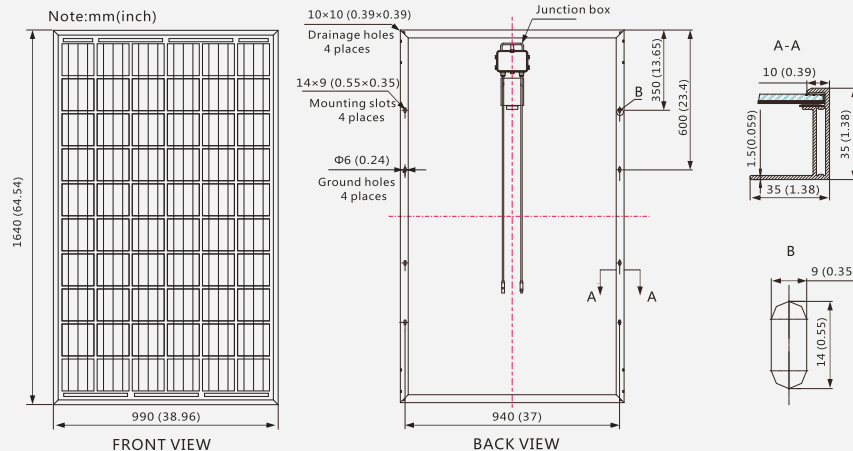

IV-Curves

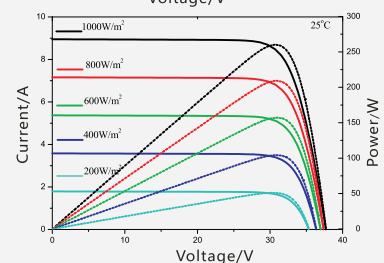

Excellent performance under weak light condition.