
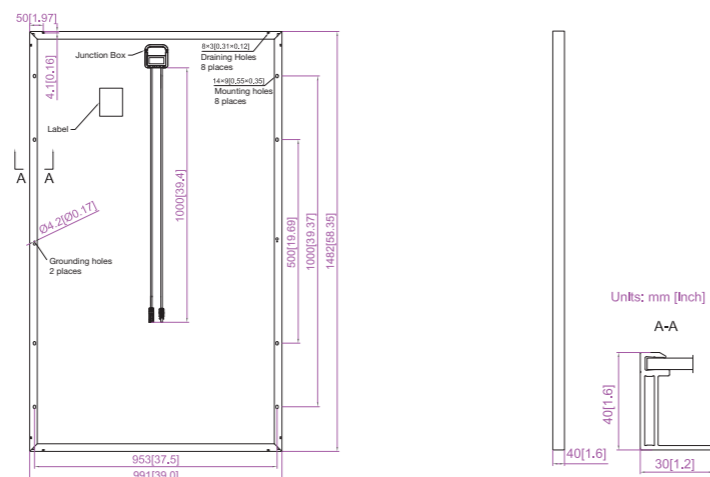


Engineering Drawings



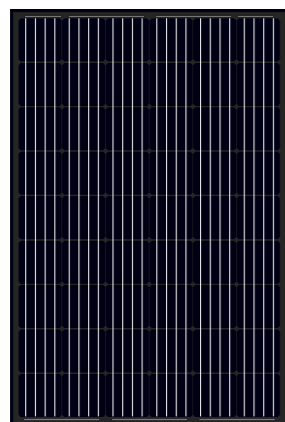


MECHANICAL PARAMETERS	
Cell (mm)	Almost Full Square Mono 156x156
Weight (kg)	16.5 (approx)
Dimensions (L×W×H) (mm)	1482×991×40
Cable Cross Section Size (mm <sup>2</sup> )	4
No. of Cells and Connections	54 (6×9)
Junction Box	IP67, 3 diodes
Connector	MC4 Compatible
Packaging Configuration	26 Per Pallet

WORKING CONDITIONS	
Maximum System Voltage	DC 1000V (IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	15A
Maximum Static Load, Front Maximum Static Load, Back	5400Pa (112 lb/ft <sup>2</sup> ) 2400Pa (50 lb/ft <sup>2</sup> )
NOCT	45±2°C
Application Class	Class A


TYPE	ELECTRICAL PARAMETERS				
	JAM6(L)(BK) 54-250/PR	JAM6(L)(BK) 54-255/PR	JAM6(L)(BK) 54-260/PR	JAM6(L)(BK) 54-265/PR	JAM6(L)(BK) 54-270/PR
Rated Maximum Power at STC (W)	250	255	260	265	270
Open Circuit Voltage (Voc/V)	35.12	35.23	35.34	35.45	35.57
Maximum Power Voltage (Vmp/V)	28.65	28.83	29.02	29.23	29.44
Short Circuit Current (Isc/A)	9.34	9.46	9.58	9.71	9.83
Maximum Power Current (Imp/A)	8.73	8.84	8.96	9.07	9.17
Module Efficiency [%]	16.91	17.25	17.58	17.92	18.26
Power Tolerance (W)	-0~+5W				
Temperature Coefficient of Isc (αIsc)	+0.060%/°C				
Temperature Coefficient of Voc (βVoc)	-0.300%/°C				
Temperature Coefficient of Pmax (γPmp)	-0.390%/°C				
STC	Irradiance 1000W/m <sup>2</sup> , Module Temperature 25°C, Air Mass 1.5				

I-V CURVE



TYPE	NOCT				
	JAM6(L)(BK) 54-250/PR	JAM6(L)(BK) 54-255/PR	JAM6(L)(BK) 54-260/PR	JAM6(L)(BK) 54-265/PR	JAM6(L)(BK) 54-270/PR
Max Power (Pmax) [W]	182.75	186.41	190.06	193.72	197.37
Open Circuit Voltage (Voc) [V]	32.63	32.78	32.88	32.99	33.07
Max Power Voltage (Vmp) [V]	25.45	25.61	25.78	25.93	26.11
Short Circuit Current (Isc) [A]	7.54	7.63	7.75	7.86	7.97
Max Power Current (Imp) [A]	7.18	7.28	7.37	7.47	7.56
Condition	Under Normal Operating Cell Temperature, Irradiance of 800 W/m <sup>2</sup> , spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s				

# Higher Efficiency 250W Mono

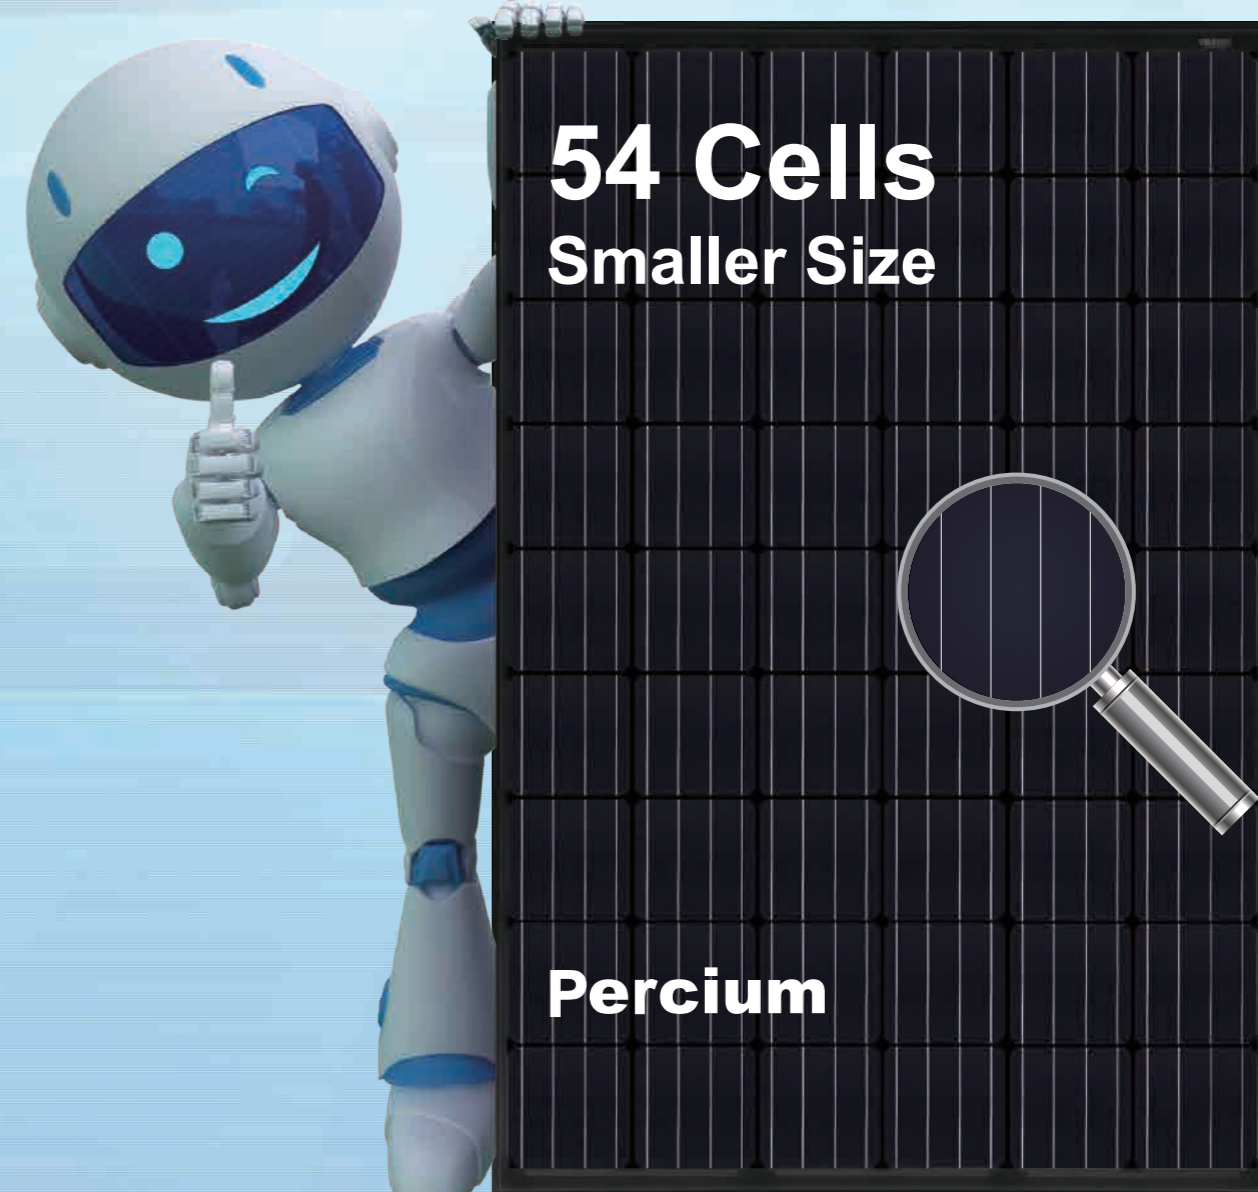


Harvest the Sunshine  
Premium Cells, Premium Modules

### Percium Cell

- The mono cell technology with passivated backside and local BSF
- >20.4% average mass production efficiency


Average Mass Production Efficiency >20.4%

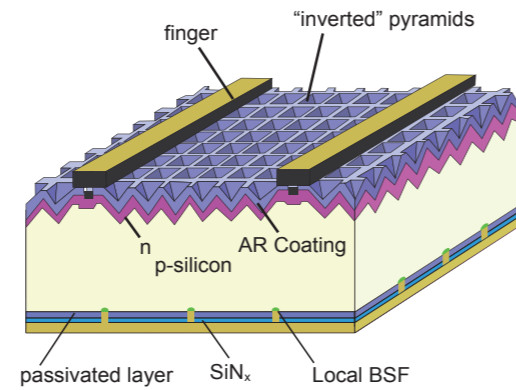

### More Power Per m<sup>2</sup>

JA higher efficiency smaller size module type special design for UK rooftop market

Benefit: 6% More Power

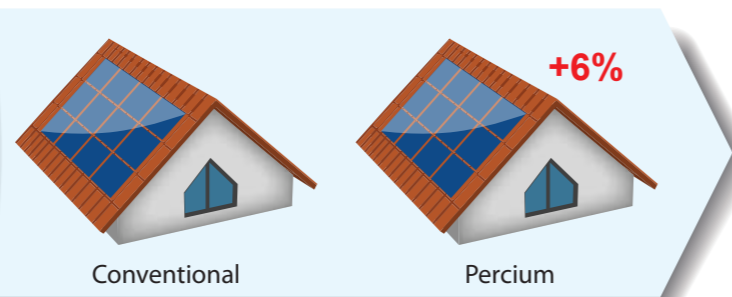


Percium module 250Wp VS Conventional module 235Wp

### Lower System Cost

Higher conversion efficiency help you save

- Transportation cost
- Installation cost
- BOS cost

Benefit: Save System Costs Per Watt

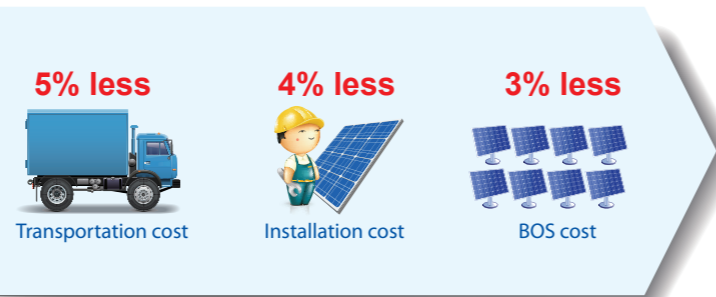


Cost saving estimation made by comparison between 235W and 250W modules

### Excellent Low-light Performance

Enhanced spectral response at longer wavelength boosts low-light performance, which can produce more than 1% additional power compared with conventional module at system side.

Benefit: 1% Additional Power Output

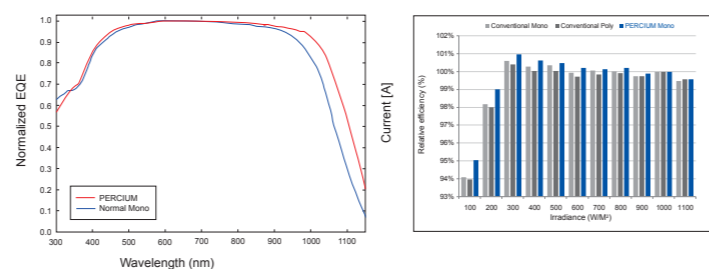

EQE—External quantum efficiency Relative module efficiency comparison under different irradiance

Source: TÜVRheinland

### High Reliability

- Long-term reliability tests
- Harsh climate environment endurance tests
- PID-resistance tests
- Certified by TÜV SÜD and ETL
- Industry-leading cell technology
- High quality components from best suppliers
- Manufacturing inspected and certified by PI-Berlin and Solar-IF
- 100% in-house automatic manufacturing
- 2X 100% EL inspection ensuring defect-free



### Other Features

- Positive power tolerance: -0~+5W
- Modules binned by current to improve system performance
- Excellent mechanical load resistance: Certified to withstand high wind loads (2400Pa) and snow loads (5400Pa)

### Comprehensive Certificates

- IEC 61215, IEC 61730, UL1703, CEC Listed, MCS and CE
- ISO 9001: 2008: Quality management systems
- ISO 14001: 2004: Environmental management systems
- BS OHSAS 18001: 2007: Occupational health and safety management systems
- Environmental policy: The first solar company in China to complete Intertek's carbon footprint evaluation program and receive green leaf mark verification for our products



Specifications subject to technical changes and tests. JA Solar reserves the right of final interpretation.


### JA Solar Holdings Co., Ltd.

JA Solar Holdings Co.,Ltd is a world leading manufacturer of high-performance solar power products that convert sunlight into electricity for residential, commercial and utility-scale power generation. The company was founded in May 2005 and publicly listed on NASDAQ in February 2007. JA Solar has been the world's leading cell producer since 2010, and has firmly established itself as a tier 1 module supplier since 2012. Capitalizing on our strength in solar cell technology, we are committed to provide modules with unparalleled conversion efficiency, yield efficiency, and reliability to enable you to maximize your returns on PV projects. With its leading industry experience, continuous effort on R&D, customer-oriented service and sound financial status, JA Solar is your best choice of long-term trustworthy partner.

Add : NO.36, Jiang Chang San Road, Zhabei, Shanghai 200436, China  
Tel : +86 21 6095 5888 / +86 21 6095 5999  
Fax : +86 21 6095 5858 / +86 21 6095 5959  
Email : sales@jasolar.com market@jasolar.com

### Product Warranty

- 10-year product warranty
- 25-year linear power warranty

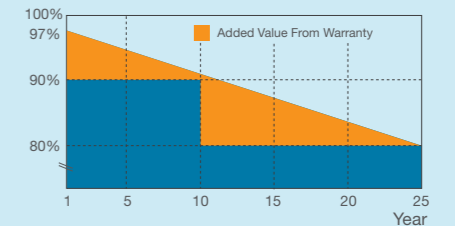

### Additional Insurance Options



### Partner Section