

# SHARP

ND-RC250 | 250 W  
ND-RC255 | 255 W  
ND-RC260 | 260 W

The reliable solution (RC)  
**250/255/260 W**  
Poly



## For your independence

Take advantage of solar panels + battery solutions for maximum independence



55 years of solar expertise



Guaranteed positive power tolerance (0/+5 %)



Made in Germany



Top PV brand award



Proven Quality

VDE (IEC/EN 61215, IEC/EN61730)  
Safety Class II / CE  
MCS accredited product  
ISO 9001 / ISO 14001



Polycrystalline silicon photovoltaic modules



Robust product design

10 YEARS

Product guarantee

25 YEARS

Linear performance guarantee

## Electrical data (at STC)

		ND-RC260	ND-RC255	ND-RC250	
Maximum power	$P_{max}$	260	255	250	$W_p$
Open-circuit voltage	$U_{oc}$	37.7	37.6	37.5	V
Short-circuit current	$I_{sc}$	9.01	8.88	8.76	A
Voltage at point of maximum power	$U_{mpp}$	30.5	30.4	30.3	V
Current at point of maximum power	$I_{mpp}$	8.51	8.38	8.24	A
Module efficiency	$\eta_m$	15.8	15.5	15.2	%

STC = Standard Test Conditions: irradiance 1,000 W/m<sup>2</sup>, AM 1.5, cell temperature 25 °C.  
Rated electrical characteristics are within ±10 % of the indicated values of  $I_{sc}$ ,  $U_{oc}$ , and 0 to +5 % of  $P_{max}$  (power measurement tolerance ±3 %).

## Electrical data (at NOCT)

		ND-RC260	ND-RC255	ND-RC250	
Maximum power	$P_{max}$	190	187	183	$W_p$
Open-circuit voltage	$U_{oc}$	34.6	34.6	34.5	V
Short-circuit current	$I_{sc}$	7.33	7.22	7.12	A
Voltage at point of maximum power	$U_{mpp}$	27.6	27.5	27.4	V
Module efficiency	$\eta_m$	14.5	14.2	13.9	%

NOCT: Module operating temperature at 800 W/m<sup>2</sup> irradiance, air temperature of 20 °C, AM 1.5, wind speed of 1 m/s, NOCT: 47°C

### Limit values

Maximum system voltage	1,000 V
Over-current protection	15 A
Temperature range	-40 to 85° C
Max. mechanical load (snow/wind)	2,400 Pa
Tested snow load (IEC61215 test pass*)	5,400 Pa

### Mechanical data


Length	1,660 mm
Width	990 mm
Depth	50 mm
Weight	20 kg

\*Please refer to Sharp's installation manual for details.


### Temperature coefficient

$P_{max}$	-0.42 %/°C
$U_{oc}$	-0.31 %/°C
$I_{sc}$	0.05 %/°C

## Characteristic curves ND-RC260

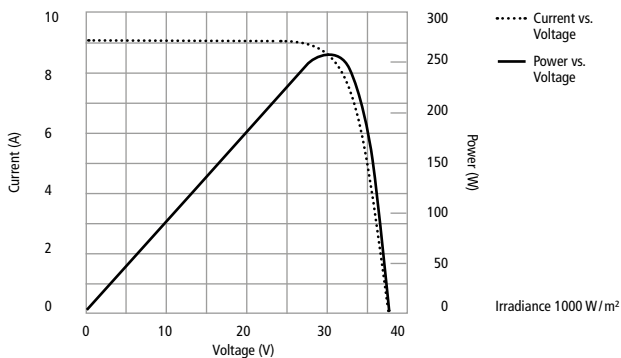

## Dimensions (mm)

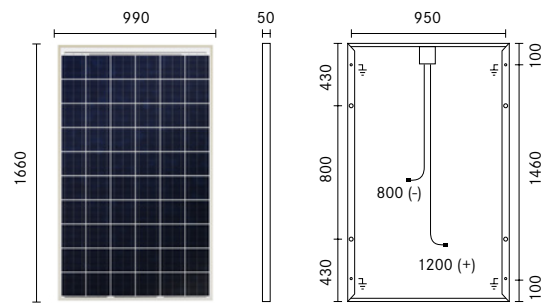

## General data

Cells	polycrystalline, 156.5 mm × 156.5 mm, 60 cells in series
Front glass	low iron tempered glass, 3 mm
Frame	anodized aluminium alloy, silver
Connection box	PPE/PPO resin, IP65 Rating, 109 x 110 x 13.7 mm, 3 bypass diodes
Cable	CE cable, length 1,200 mm (+), 800 mm (-)
Connector	MC4

## Packaging data

Modules per palette	22 pcs
Palette size (L × W × H)	1.2 m × 1.0 m × 1.85 m
Palette weight	approx. 490 kg
Modules packed in one carton	22 pcs



[www.sharp.eu](http://www.sharp.eu)

**SHARP**

### Contact Sharp

SHARP ENERGY SOLUTIONS EUROPE  
A DIVISION OF SHARP ELECTRONICS (EUROPE) LTD.  
SONNINSTR. 3  
20097 HAMBURG  
GERMANY  
T: +49 (0) 40/2376-2436  
F: +49 (0) 40/2376-2193

### Contact Installer

Local responsibility: **Benelux** SolarInfo.seb@sharp.eu, **France** SolarInfo.fr@sharp.eu, **Germany** SolarInfo.de@sharp.eu, **Poland** energy-info.pl@sharp.eu  
**Spain & Portugal** SolarInfo.es@sharp.eu, **United Kingdom** SolarInfo.uk@sharp.eu, **Other countries** SolarInfo.Europe@sharp.eu