


Monocrystalline solar module


Typical electrical characteristics

Characteristics	ZDNY-240CB60	ZDNY-245CB60	ZDNY-250CB60
Max.Power (Pmax)	240Wp	245Wp	250Wp
Optimum Operating Voltage (Vm)	30.34V	30.84V	31.17V
Optimum Operating Current (Im)	7.92A	7.95A	8.03A
Open-circuit Voltage (Voc)	37.76V	37.80V	37.85V
Short-circuit Current (Isc)	8.35A	8.38A	8.40A
Cell Efficiency	17.24%	17.60%	17.96%

Note: the specifications are obtained under the Standard Test Condition(STC): 1,000W/ m² solar irradiance, AM 1.5, Cell Temperature 25 °C.

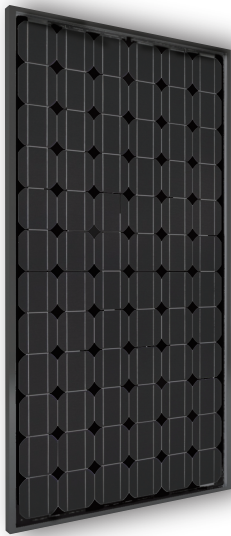


Solar Cell	Mono-crystalline 156x156mm
Output Tolerance (Pmax)	-3~+3%
Number of cells	60 cells in series
Module Dimension	1650x992x45mm
Weight	22.5kg
Max. System Voltage	1000V(TUV)/600V(UL)
Max. Series Fuse Rating	15A
Temperature cycling range	(-40~85 °C)
NOTC	47 °C
Temperature coefficients of Isc	(+0.06%/ °C)
Temperature coefficients of Voc	(-0.35%/ °C)
Temperature coefficients of Pmax	(-0.4%/ °C)
Load Capacity	276pcs/20'GP 644pcs/40'HQ

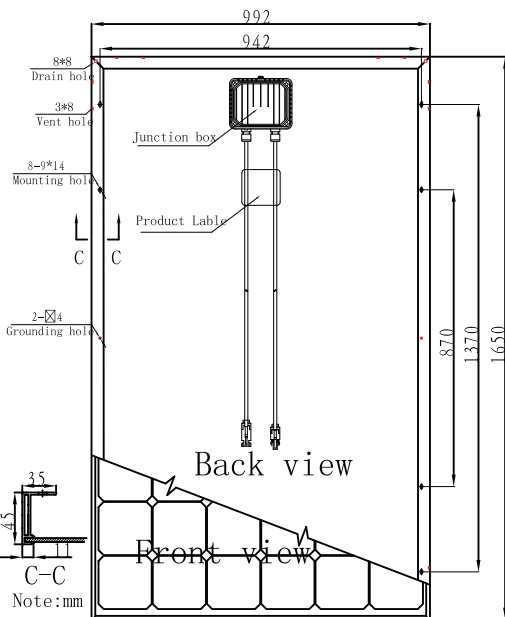

Warranty

- 10-year product warranty.
- 12-year warranty at 90% power output.
- 25-year warranty at 80% power output.
- Product enforced by CHUBB Insurance

I-V Curves of PV module ZDNY-240CB60 at various cell temperatures

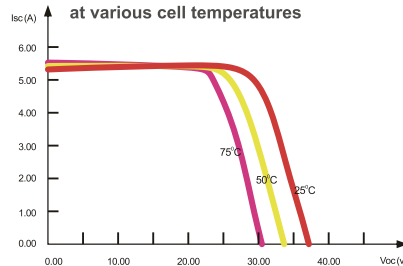

I-V Curves of PV module ZDNY-240CB60 at various solar irradiance

