




## *SOLON Domino*

Off-grid sine wave inverter.

- › Pure sine wave
- › Short circuit and overload security
- › High efficiency factor
- › Galvanic isolation

# SOLON Domino

## Off-grid application

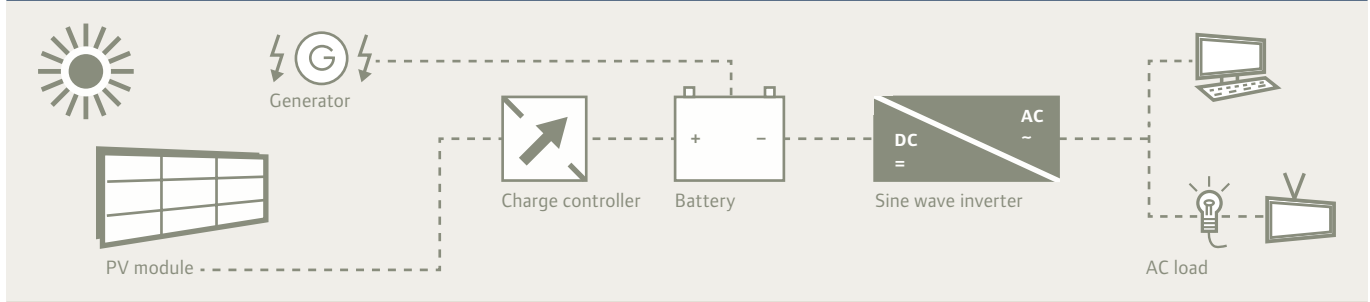

Input variables (DC)		05/12	07/24
Rated voltage DC	$U_{DC IN}$	12 V	24 V
Input voltage range	$U_{DC}$	10,5 – 16,0 V <sub>DC</sub>	21,0 – 32,0 V <sub>DC</sub>
Dynamic low voltage cut (depending on load)	$U_{DC}$	10,5 – 9,0 V <sub>DC</sub>	21,0 – 18,0 V <sub>DC</sub>
Rated current DC	$I_{DC IN}$	50 A	35 A
Max. current	$I_{DC max}$	160 A	150 A

## Output variables (AC)

Rated output current AC	$I_{AC OUT}$	2,1 A	3,0 A
Short circuit current (max. 0.5 s)	$I_{AC K}$	6 A	8 A
Continuous power	$P_{AC}$	550 VA	710 VA
Rated power (10 min at $T_A = 20^\circ C$ )	$P_{10}$	675 VA	1,300 VA
Rated power (30 min at $T_A = 20^\circ C$ )	$P_{30}$	620 VA	1,100 VA
Rated output voltage AC (short circuit proof)	$U_{AC OUT}$	230 V <sub>AC</sub> ± 2 %	230 V <sub>AC</sub> ± 2 %
Output frequency (pure sine wave)	$f_{AC}$	50 Hz ± 0.5 %	50 Hz ± 0.5 %
Power factor	$\cos\Phi$	0,3 – 1,0	0,3 – 1,0

## Typical data

Dimensions (L x W x H)	275 x 155 x 96 mm	275 x 155 x 96 mm
Weight	5.1 kg	6.8 kg
Efficiency factor max.	93 %	94 %
Consumption 230 V <sub>AC</sub> OK	5 W	8 W
DC breaker	63 A	63 A
Remote control ON/OFF	No	No

Housing protection	IP 20
Status indication	LED
Reset after short circuit	Every 60 s
Reset after overload	Every 60 s
Reset after overtemperature	Automatically after reaching semiconductor temp. 45°C
Reset after battery failure	Automatically after reaching U <sub>DC IN</sub>

Ambient temperature range	-25°C to +50°C (max. 95 % rH, non-condensing)
Consumption Standby/OFF	ca. 1,5 W (testpulse 800 ms) / 10 mA
Toroidal transformer	Galvanically isolated EN61558 (ICE61558)
Temperature and load controlled fan	ON 55°C/OFF 45°C, P <sub>D</sub> > 80 %
Warranty	2 years
Certificate	Declaration of conformity



**SOLON Inverters AG**  
Bürgerfeldstrasse 19  
8730 Uznach/SG · Switzerland

Phone +41 55 24641-14  
Fax +41 55 24641-16  
E-Mail inverters@solon.com

**SOLON SE**  
Am Studio 16  
12489 Berlin · Germany

Phone +49 30 81879-0  
Fax +49 30 81879-9999  
E-Mail components@solon.com

**SOLON S.p.A.**  
Via dell'Industria e dell'Artigianato 2  
35010 Carmignano di Brenta PD · Italy

Phone +39 049 9458200  
Fax +39 049 9458299  
E-Mail solon.it@solon.com

Your specialty retailer

[www.solar-wind.co.uk](http://www.solar-wind.co.uk)

For more information on SOLON products visit us on [www.solon.com](http://www.solon.com).