



Technical Documentation

VisionAIR⁵ Technical Specifications

Document Number (s): UGE-05M-SP-001

Original Date: 04/30/2013

Revised On: 05/23/2014

Version: 1.4

Completed by: BC

Checked by: TM

Please note that our documents are regularly updated. You may verify the validity of this document by visiting: www.urbangreenenergy.com/documents



VisionAIR⁵ Wind Turbine Specifications

Physical Information

Axis	Vertical
Height	5.2 m [17'-1"]
Width	3.2 m [10'-6"]
Swept Area	16.6 m ² [179 ft ²]
Weight	756 kg [1665 lbs]
Blade Materials	Fiberglass

Turbine Operation

Cut-in Wind Speed	3.5 m/s [8 mph]
AWEA Rated Wind Speed	11 m/s [24 mph]
Max Power Wind Speed	14 m/s [31 mph]
Cut-out Wind Speed	20 m/s [44 mph]
Survival Wind Speed	50 m/s [110 mph]
Rated RPM	130 RPM
AWEA Rated Sound Level	38.73 dBA



Electric Generation

Drive System	Direct Drive
Generator UL Rated Power	3.2 kW
Generator Rated Voltage	
Off-Grid	270 V _{dc} equivalent
Grid-Tie	530 V _{dc} equivalent
Temperature Range	-25 C to 40 C [-14 F to 105 F]
Inverters and Controllers	Available for all locations and regulations

Certifications

UL 1004 / CSA C22.2	Generator Electrical Safety
IEC 61400-11	Acoustic Noise Measurement
IEC 61400-12	Power Performance Measurement
ISO 9001	Manufacturing Quality Management
CE	European Conformity

Model Number UGE-5M

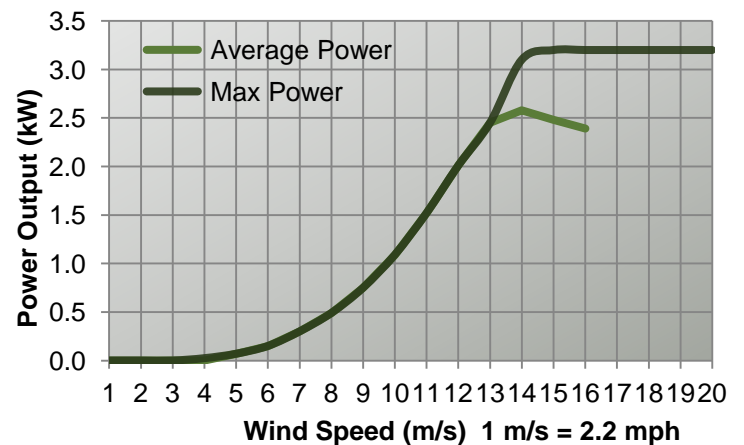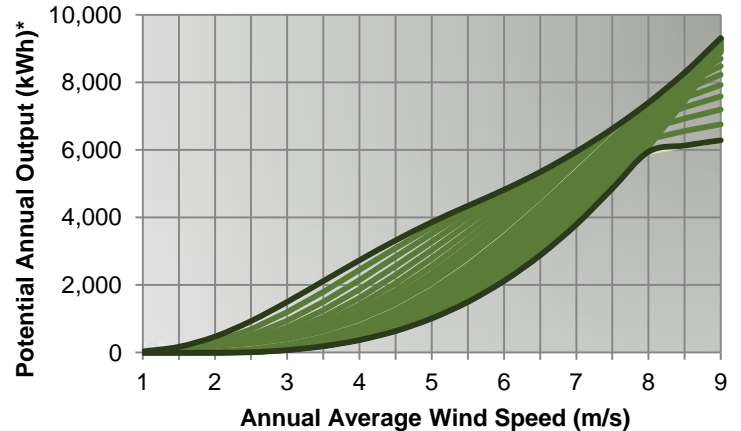

* Annual energy production is dependent on location wind turbulence and wind speed distribution