

FULL SQUARE MONO




JA Solar Holdings Co., Ltd.

JA Solar Holdings Co., Ltd. is a world-leading manufacturer of high-performance photovoltaic products that convert sunlight into electricity for residential, commercial, and utility-scale power generation. The company was founded on May 18, 2005, and was publicly listed on NASDAQ on February 7, 2007. JA Solar is one of the world's largest producers of solar cells and modules. Its standard and high-efficiency product offerings are among the most powerful and cost-effective in the industry.

A d d : NO.36, Jiang Chang San Road, Zhabei, Shanghai 200436, China
T e l : +86 21 6095 5888 / +86 21 6095 5999
F a x : +86 21 6095 5858 / +86 21 6095 5959
Email: sales@jasolar.com market@jasolar.com

Superior Warranty

- 10-year product warranty
- 25-year linear power output warranty

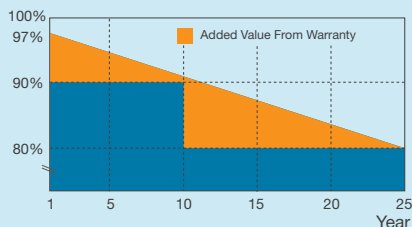

JAM6(R) (BK)

60/260-280

FULL SQUARE MONOCRYSTALLINE SILICON MODULE

Key Features



Full Square Monocrystalline modules designed for residential and utility applications, rooftop or ground mount



High power output of more than 275W and module efficiency up to 16.82% which has been verified by TÜV Rheinland



Anti-reflective and self-cleaning surface reduces power loss from dirt and dust



Outstanding performance in low-light irradiance environments



Excellent mechanical load resistance: Certified to withstand high wind loads (2400Pa) and snow loads (5400Pa)



High salt and ammonia resistance certified by TÜV NORD

Reliable Quality

- Positive power tolerance: 0~+5W
- 100% EL double-inspection ensures modules are defect free
- Modules binned by current to improve system performance
- Potential Induced Degradation (PID) Resistant

Comprehensive Certificates



- IEC 61215, IEC 61730, UL1703, CEC Listed, MCS and CE
- ISO 9001: 2008: Quality management systems
- ISO 14001: 2004: Environmental management systems
- BS OHSAS 18001: 2007: Occupational health and safety management systems
- Environmental policy: The first solar company in China to complete Intertek's carbon footprint evaluation program and receive green leaf mark verification for our products



Specifications subject to technical changes and tests. JA Solar reserves the right of final interpretation.

JAM6(R)(BK) 60/260-280

Engineering Drawings

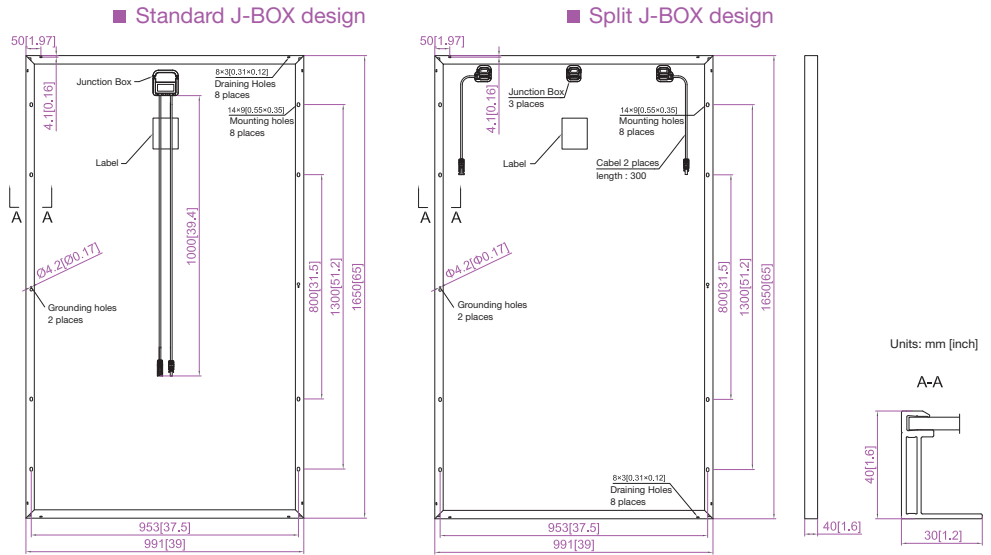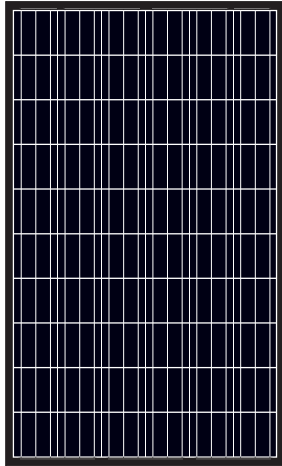

■ customized cable length available upon request

MECHANICAL PARAMETERS

Cell (mm)	Full Square Mono 156x156
Weight (kg)	18.2 (approx)
Dimensions (LxWxH) (mm)	1650x991x40
Cable Cross Section Size (mm ²)	4
No. of Cells and Connections	60 (6x10)
Junction Box	IP67, 3 diodes
Connector	MC4 Compatible
Packaging Configuration	26 Per Pallet

WORKING CONDITIONS

Maximum System Voltage	DC 1000V(TÜV)
Operating Temperature	-40 C ~+85 C
Maximum Series Fuse	15A
Maximum Static Load, Front (e.g., snow and wind)	5400Pa (112 lb/ft ²)
Maximum Static Load, Back (e.g., wind)	2400Pa (50 lb/ft ²)
NOCT	45±2 C
Application Class	Class A




ELECTRICAL PARAMETERS

TYPE	JAM6(R)(BK) 60-260	JAM6(R)(BK) 60-265	JAM6(R)(BK) 60-270	JAM6(R)(BK) 60-275	JAM6(R)(BK) 60-280
Rated Maximum Power at STC (W)	260	265	270	275	280
Open Circuit Voltage (Voc/V)	38.32	38.52	38.71	38.89	39.07
Maximum Power Voltage (Vmp/V)	30.49	30.78	31.08	31.36	31.64
Short Circuit Current (Isc/A)	9.04	9.13	9.21	9.30	9.39
Maximum Power Current (Imp/A)	8.53	8.61	8.69	8.77	8.85
Module Efficiency [%]	15.90	16.21	16.51	16.82	17.12
Power Tolerance (W)	-0~+5W				
Temperature Coefficient of Isc (αIsc)	+0.049%/°C				
Temperature Coefficient of Voc (βVoc)	-0.340%/°C				
Temperature Coefficient of Pmax (γPmp)	-0.410%/°C				
STC	Irradiance 1000W/m ² , Module Temperature 25°C, Air Mass 1.5				

NOCT

TYPE	JAM6(R)(BK) 60-260	JAM6(R)(BK) 60-265	JAM6(R)(BK) 60-270	JAM6(R)(BK) 60-275	JAM6(R)(BK) 60-280
Max Power at STC (Pmax) [W]	190.06	193.72	197.37	201.03	204.68
Open Circuit Voltage (Voc) [V]	34.83	34.97	35.09	35.21	35.46
Max Power Voltage (Vmp) [V]	27.91	28.28	28.56	28.88	28.99
Short Circuit Current (Isc) [A]	7.36	7.39	7.42	7.46	7.47
Max Power Current (Imp) [A]	6.81	6.85	6.91	6.96	7.06
Condition	Under Normal Operating Cell Temperature, Irradiance of 800 W/m ² , spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s				

I-V CURVE



Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.